

BENEFITS

Integrated DOCSIS 3.0 modem with 8 x 4 bonded channels

Ruggedized outdoor enclosure with DOCSIS 3.0 certified modem providing bonded 8 downstream and 4 upstream channels

Unmatched Wi-Fi range and reliability

Adaptive antenna technology with 802.11n (3 x 3) combined with unique interference avoidance technology delivers up to an additional 6 dB of BeamFlex gain in addition to the 10 dBi physical antenna gain to maximize capacity and coverage

Extended coverage means fewer APs

Directional, high-gain antennas dynamically combine to deliver two- to four-times the coverage area compared to typical outdoor APs

Channel selection optimizes throughput

ChannelFly dynamic channel management, based on throughput measurements, not just interference, chooses the best channel to give users the highest throughput

Strand mounted hardened enclosure for outdoor deployment

IP-67 water and dust proof enclosure with strand mount for deployment on MSOs

Enables a myriad of new services and service opportunities

Smart Wi-Fi applied outdoors now enables new revenue-generating services such as community Wi-Fi, IP-video applications, multimedia hotspots, extended WLAN services outdoors and 3G data offloading

Lower deployment costs and reduced truck rolls

Lightweight enclosure simplifies deployment. Remote reboots between APs and Cable Modem Management minimizes truck rolls

ZoneFlex™ 7761-CM

DUAL-BAND 802.11N SMART WI-FI OUTDOOR AP WITH INTEGRATED DOCSIS 3.0 MODEM

First high performance strand-mounted 802.11n Smart Wi-Fi access point with cable modem

The Ruckus ZoneFlex 7761-CM is the first purpose-built strand-mounted access point to combine dual-band 802.11n with an integrated DOCSIS 3.0 certified modem and patented smart antenna array technology to deliver unprecedented range and reliability for multiple system cable operators (MSOs).

The Ruckus 7761-CM is lightweight and can be easily installed and integrated with the cable operator's network. It leverages existing cable assets, including mounting, power, backhaul and customer service systems to quickly and easily extend wireless services to cable operators' customers.

The ZoneFlex 7761-CM implements Ruckus-patented BeamFlex™ smart antenna technology that enables consistent, high-performance, extended coverage and multimedia support. Network operators can create different quality of service for various WLANs to provide tiered services.

The ZoneFlex 7761-CM is the industry's first AP to integrate a DOCSIS 3.0 modem supporting 8 downstream and 4 upstream bonded channels with theoretical data rates of up to 340 Mbps (downstream) and 130 Mbps (upstream).

The Ruckus ZoneFlex 7761-CM is ideal for MSOs expanding branded broadband services through their cable infrastructure to provide hotspot services to neighborhoods, resorts, train stations, and other public locations. The 7761-CM delivers broadband services outdoors to extend managed wireless LANs (WLANs) for strand mounted locations and where Ethernet cabling is not feasible.

The ZoneFlex 7761-CM can be centrally managed by the ZoneDirector Smart WLAN controller as part of a unified indoor/outdoor wireless LAN or deployed as a standalone AP and managed individually or through the FlexMaster remote Wi-Fi management system.


ZoneFlex™ 7761-CM

**DUAL-BAND 802.11N SMART WI-FI
OUTDOOR AP WITH INTEGRATED
DOCSIS 3.0 MODEM**

Remote monitoring and network management

The Ruckus 7761-CM can be remotely managed using either the Ruckus Wi-Fi FlexMaster management platform and/or the Service Provider's own Cable Management system to take advantage of the best of both worlds in terms of cable network management and wireless monitoring.


The integrated management approach provides complete network-wide support for Fault, Configuration, and Performance Management. Patent pending software algorithm allows the Ruckus 7761-CM to be remotely controlled from either the Cable MSO management system or from the wireless mesh interface in the case of temporary network interruptions, thereby avoiding expensive and inefficient truck rolls.

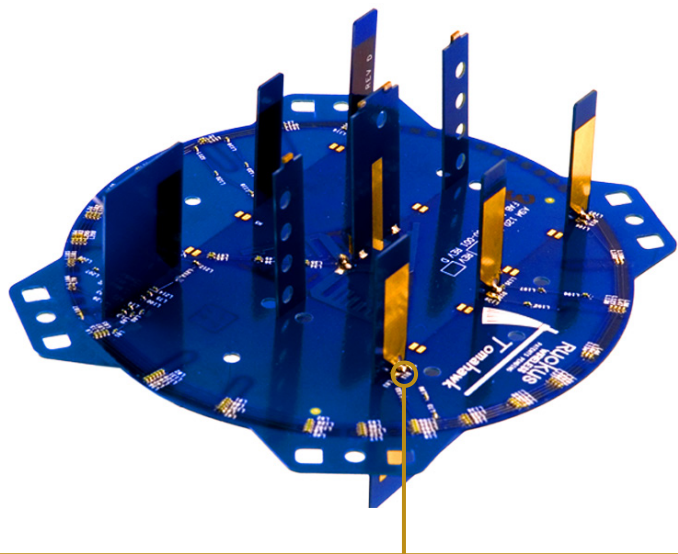

A patented smart antenna array integrates six high-gain vertically-polarized and six horizontally-polarized antenna elements. With BeamFlex, this enables up to 4096 potential antenna combinations and up to an additional 6 dB BeamFlex on top of the 10 dBi physical antenna gain, thereby delivering unprecedented range extension and signal reliability. The dual polarized smart antenna increases the effectiveness of spatial-multiplexing, resulting in higher data rates.

FEATURES


- Concurrent dual-band (5GHz/2.4GHz) operation
- Adaptive antenna technology and advanced RF management
- Automatic interference mitigation, optimized for high-density environments
- Integrated smart antenna array with over 4,000 unique patterns for ultra availability
- Standard 802.3af output for IP surveillance camera
- Strand mountable
- Extended temperature range for cold climates (-40° C)
- Multicast IP video streaming
- 16 BSSIDs with unique QoS and security policies
- Advanced QoS packet classification and automatic priority for latency sensitive traffic
- WEP, WPA-PSK (AES), 802.1X support
- Flexible tunneling with L2TP
- Band steering
- Airtime fairness
- Integrated 8 x 4 DOCSIS 3.0 modem
- Remote reboots between AP and CM
- Dynamic channel management

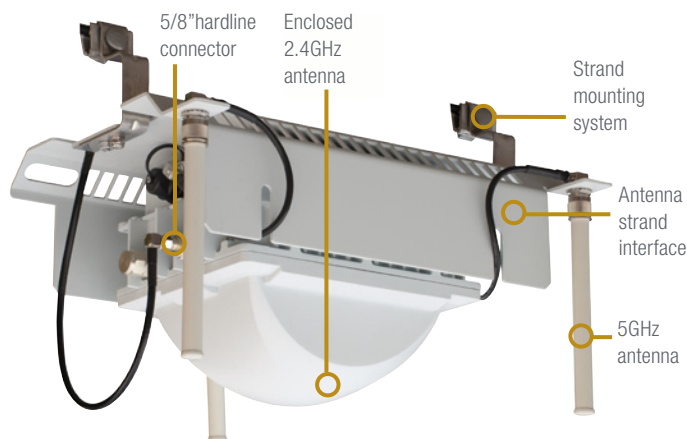

ZoneFlex™ 7761-CM

DUAL-BAND 802.11N SMART WI-FI
OUTDOOR AP WITH INTEGRATED
DOCSIS 3.0 MODEM

ZONEFLEX 7761-CM PRODUCT HIGHLIGHTS



Internal 2.4 GHz smart antenna array with high gain
5 GHz external antennas



Ruggedized and “not-obvious” outdoor enclosure




Integrated DOCSIS 3.0 cable modem leverages existing MSO cable plant




Lightweight for ease of installation

ZoneFlex 7761-CM detailed planning and troubleshooting with FlexMaster

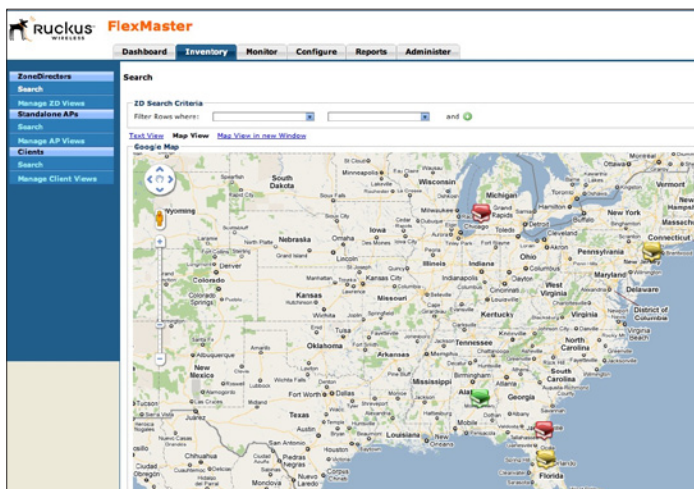


Comprehensive event management

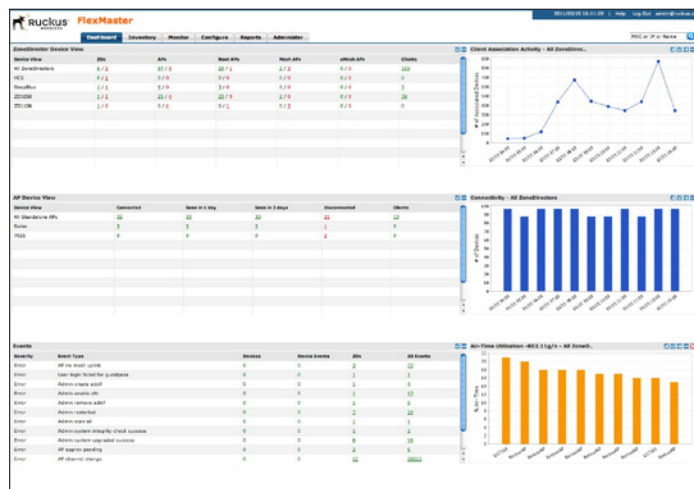

Automated and customized super dashboard

ZoneFlex™ 7761-CM

DUAL-BAND 802.11N SMART WI-FI
OUTDOOR AP WITH INTEGRATED
DOCSIS 3.0 MODEM

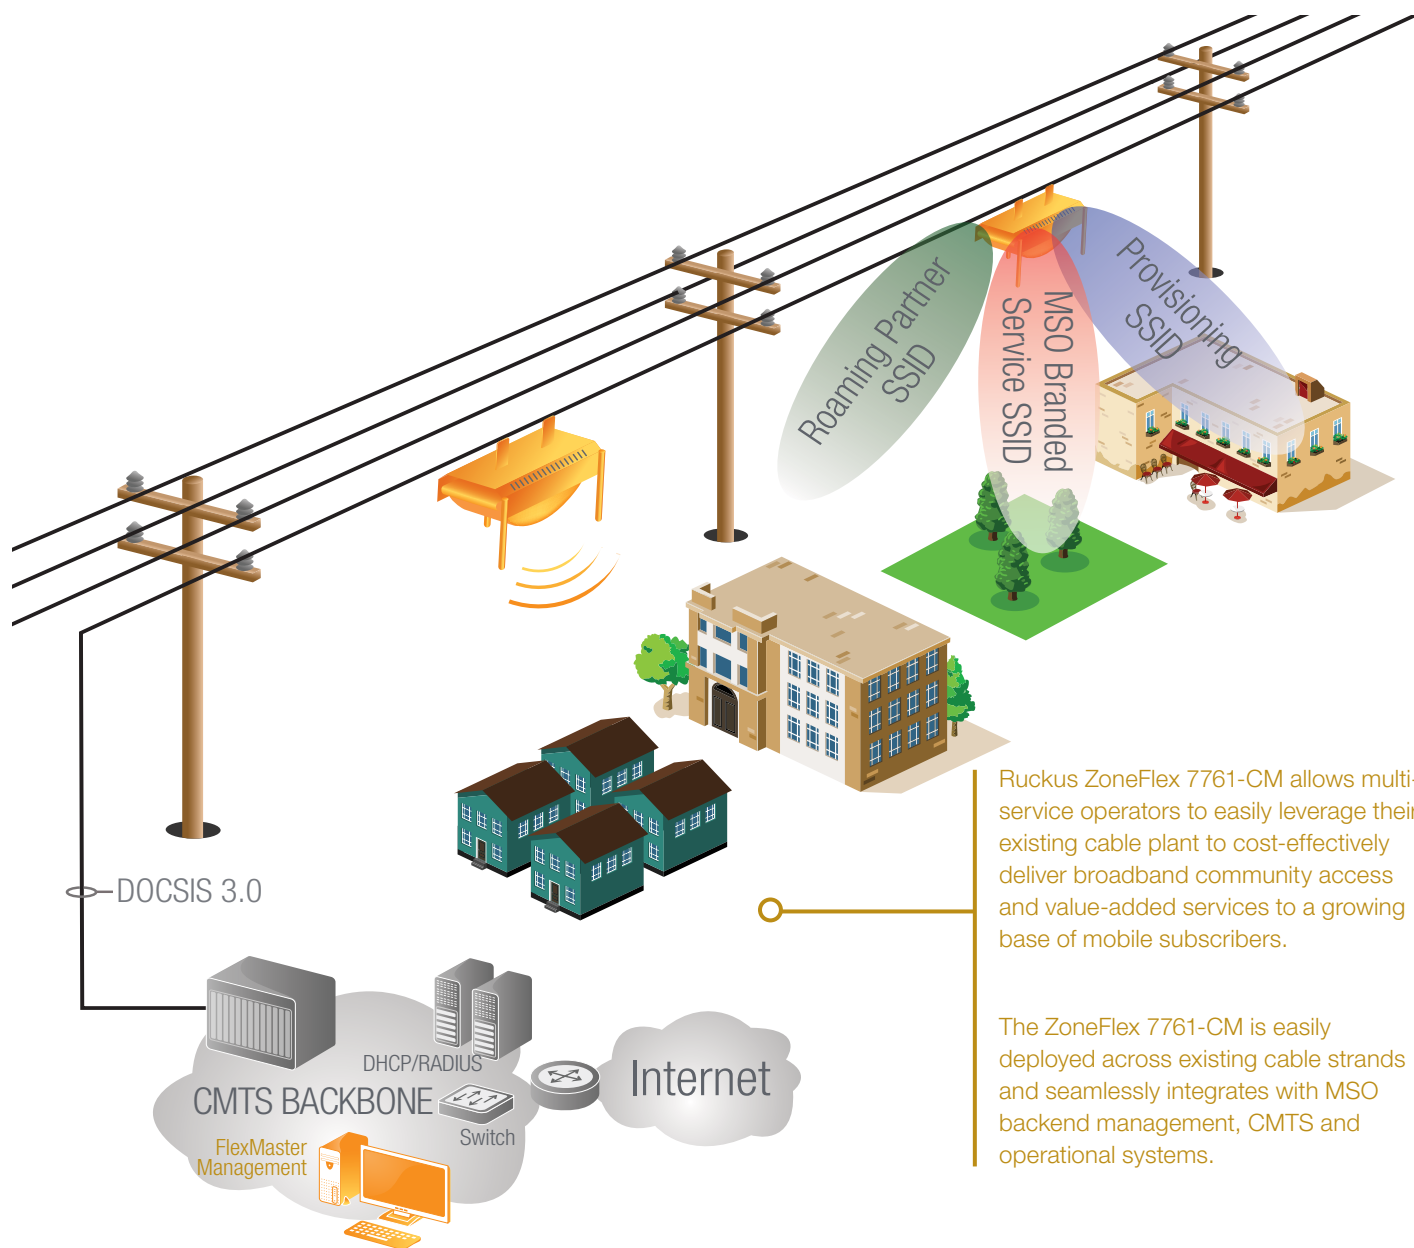

Ruckus ZoneFlex 7761-CM allows multi-service operators to easily leverage their existing cable plant to cost-effectively deliver broadband community access and value-added services to a growing base of mobile subscribers.

The ZoneFlex 7761-CM is easily deployed across existing cable strands and seamlessly integrates with MSO backend management, CMTS and operational systems.

Specifications

PHYSICAL CHARACTERISTICS	
POWER	<ul style="list-style-type: none"> Power by Cable Infrastructure (40-90 V) 40 to 90V AC quasi-square wave, 47 to 63 Hz through common 5/8" hardline connector
PHYSICAL SIZE	<ul style="list-style-type: none"> 41.4 cm (16.3 in) L x 32.3 cm (12.72 in) W x 27.3 cm (10.72 in) H
WEIGHT	<ul style="list-style-type: none"> 7,700 grams (17 lbs.)
ANTENNA	<ul style="list-style-type: none"> 2.4 GHz – Internal antenna array with directional and omni high-gain elements that provide over 4,000 unique antenna patterns 5 GHz – three (3) external antennas 5dBi
ETHERNET PORTS	<ul style="list-style-type: none"> 1 port, auto MDX, auto-sensing RJ45 10/100 Mbps Power over Ethernet (802.3af) output
LOCK OPTION	<ul style="list-style-type: none"> Integrated Kensington lock
ENVIRONMENTAL CONDITIONS	<ul style="list-style-type: none"> IP-67 rated Operating air temperature: -40°C – 65°C (-40°F – 149°F) Shock and vibration: ETSI300-019-1-4
POWER DRAW	<ul style="list-style-type: none"> 12V DC option 10W standby mode 25W (with Heater and PoE output Disabled) 60W (with Heater and PoE output Enabled)

CABLE MODEM SPECIFICATIONS	
STANDARD	<ul style="list-style-type: none"> DOCSIS 3.0 with 8 x 4 bonded channels Euro-DOCSIS 3.0 (optional)
CABLE MODEM THROUGHPUT	<ul style="list-style-type: none"> Up to 320 Mbps (theoretical)
PROTECTION CIRCUITS	<ul style="list-style-type: none"> IEEE C62, 41-1991 GR1089 – 6 kV (3000 A) surge

PERFORMANCE AND CAPACITY	
TARGET UDP THROUGHPUT	<ul style="list-style-type: none"> Up to 50 Mbps sustained throughput over 500 feet to client devices
CONCURRENT STATIONS	<ul style="list-style-type: none"> 256
SIMULTANEOUS VoIP CLIENTS	<ul style="list-style-type: none"> Up to 20

RF	
ANTENNA	<ul style="list-style-type: none"> Adaptive antenna array that provides 4,000+ unique antenna patterns
MAXIMUM EIRP	<ul style="list-style-type: none"> 2.4 GHz: 33 dBm 5 GHz: 31 dBm
PHYSICAL ANTENNA GAIN	<ul style="list-style-type: none"> 10 dBi
BEAMFLEX* SINR TX GAIN	<ul style="list-style-type: none"> Up to 6 dB
BEAMFLEX* SINR RX GAIN	<ul style="list-style-type: none"> Up to 4 dB
INTERFERENCE MITIGATION	<ul style="list-style-type: none"> Up to 15 dB
MINIMUM RX SENSITIVITY	<ul style="list-style-type: none"> Up to -95 dBm

*BeamFlex gains are statistical system level effects translated to enhanced SINR here, and based on observations over time in real-world conditions with multiple APs and many clients

MULTIMEDIA AND QUALITY OF SERVICE	
802.11e/WMM	<ul style="list-style-type: none"> Supported
SOFTWARE QUEUES	<ul style="list-style-type: none"> Per traffic type (4), per client
TRAFFIC CLASSIFICATION	<ul style="list-style-type: none"> Automatic, heuristics and TOS based or VLAN-defined
RATE LIMITING	<ul style="list-style-type: none"> Dynamic, per-user or per-WLAN
MANAGEMENT	
DEPLOYMENT OPTIONS	<ul style="list-style-type: none"> Standalone (individually managed) Managed by ZoneDirector Managed by FlexMaster
CONFIGURATION	<ul style="list-style-type: none"> Web User Interface (HTTP/S) CLI (Telnet/SSH), SNMP v1, 2, 3 TR-069 vis FlexMaster
WI-FI	
STANDARDS	<ul style="list-style-type: none"> IEEE 802.11a/b/g/n 2.4GHz and 5GHz concurrent operation
RADIO CHAINS	<ul style="list-style-type: none"> 3 x 3
SPATIAL STREAMS	<ul style="list-style-type: none"> 2
RF POWER OUTPUT	<ul style="list-style-type: none"> 27 dBm/500 mW*
CHANNELIZATION	<ul style="list-style-type: none"> 20 MHz and/or 40 MHz
FREQUENCY BAND	<ul style="list-style-type: none"> IEEE 802.11n: 2.4 – 2.484 GHz and 5.15 – 5.85 GHz IEEE 802.11a: 5.15 – 5.85 GHz IEEE 802.11b: 2.4 – 2.484 GHz
OPERATING CHANNELS	<ul style="list-style-type: none"> 2.4 GHz channels: US/Canada: 1-11, Europe (ETSI X30): 1-13 5 GHz channels: Country dependent for the following channel ranges: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165
BSSID	<ul style="list-style-type: none"> Up to eight per radio (16 total)
POWER SAVE	<ul style="list-style-type: none"> Supported for client
WIRELESS SECURITY	<ul style="list-style-type: none"> WEP, WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i, 802.1x
CERTIFICATIONS	<ul style="list-style-type: none"> UL/CE WEEE/RoHS compliance Wi-Fi Alliance Certification (Wi-Fi Certified*) (in process) DOCSIS 3.0 certification

* Maximum power varies by country

Product Ordering Information

MODEL	DESCRIPTION
ZoneFlex 7761-CM Dual Band 802.11n Outdoor Access Point	
901-7761-US01	Centrally managed concurrent dual band 802.11n outdoor access point with cable modem (DOCSIS 3.0)
901-7761-WW11	Centrally managed concurrent dual band 802.11n outdoor access point with cable modem (EURO DOCSIS 3.0)
901-7761-JP22	Centrally managed concurrent dual band 802.11n outdoor access point with cable modem (Japan DOCSIS)